


LED Recessed



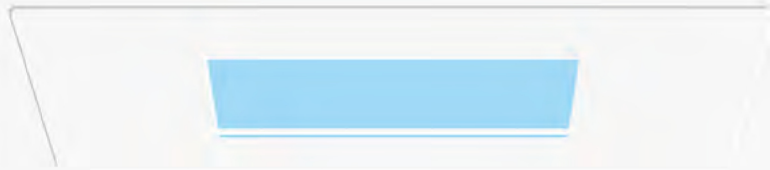


LIJIACHENG
Electric

Eco Downlight Retrofits CRI90

FEATURES

- E26/GU24 Socket
- 120V Input, 50/60Hz
- PF >0.9 - CRI >90
- High transmission frosted PC lens to reduce glare
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- UL Classification for damp locations usage
- Energy Star and CEC qualify

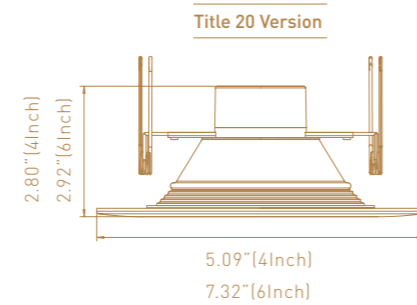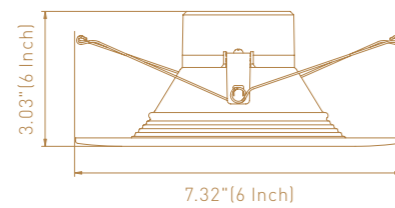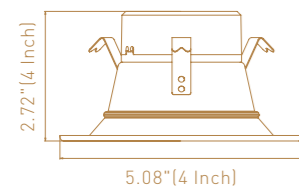

Dimmable



5 Years
Limited Warranty




High Color Rendering
(CRI > 90)



Damp
Location

Item Number	Watts	Lumens	Efficacy (lm/W)	Dimmable	Life Span (Hr)	Trim Size (Inch)	CRI	MOL (Inch)	MOD (Inch)	Weight (Lb)
HT-EAD4-0909W-XX2HL-CC	9	540	60	Y	50000	4	90	2.72	5.08	0.37
HT-EAD4-0912W-XX2HL-CC	12	750	63	Y	50000	4	90	2.72	5.08	0.37
HT-EAD6-0912W-XX2HL-CC	12	850	71	Y	50000	6	90	3.03	7.32	0.61
HT-EAD6-0915W-XX2HL-CC	15	1100	73	Y	50000	6	90	3.03	7.32	0.61
HT-US-G2Y1CD48.5W-9XX-SSZZ-V1	8.5	765	90	Y	50000	4	90	2.80	5.09	0.42
HT-US-G2Y1CD612.5W-9XX-SSZZ-V1	12.5	1125	90	Y	50000	6	90	2.92	7.32	0.68

CCT Selectable Round Downlight Retrofit


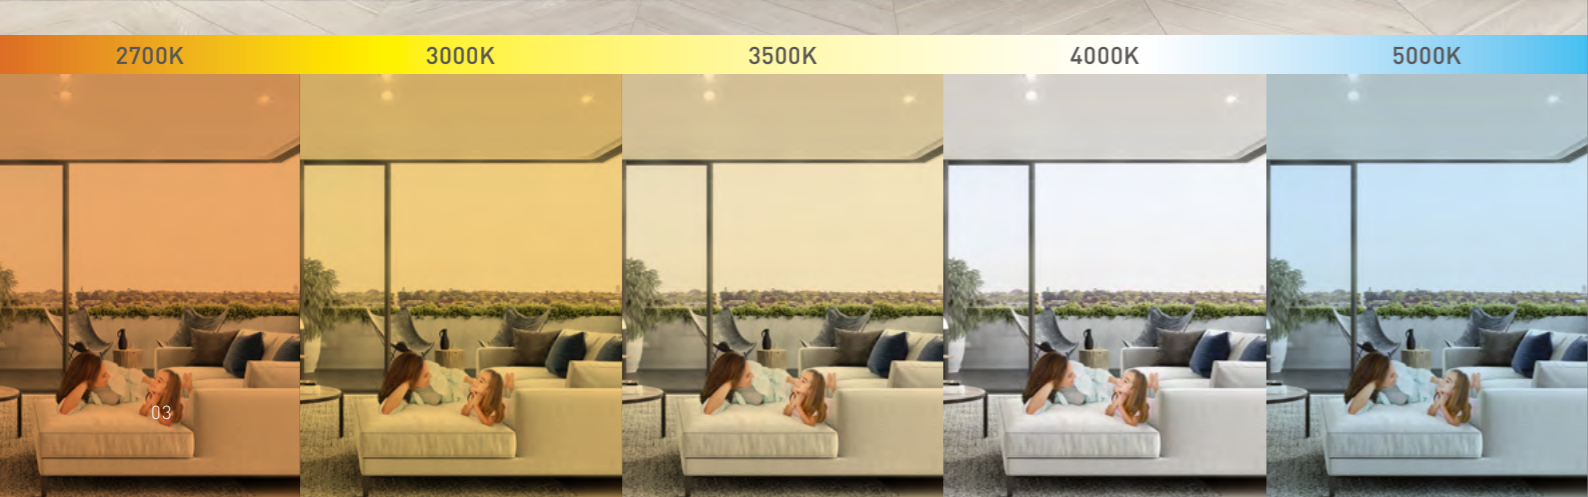


FEATURES


- E26/GU24 Socket
- 120V Input, 50/60Hz
- PF >0.9 - CRI >90
- High transmission frosted PC lens to reduce glare
- Flat and baffle trims offer different visual effects
- White tunable in 5 discrete color temperatures 27K/30K/35K/40K/50K, can be changed before, during or after installation
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify




 Dimmable	 5 Years Limited Warranty	 High Color Rendering (CRI > 90)	 Wet Location
---	--	---	---

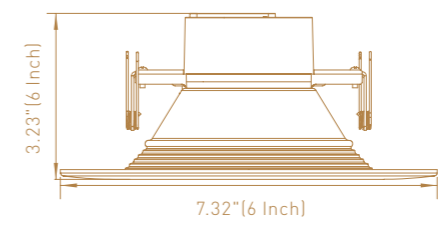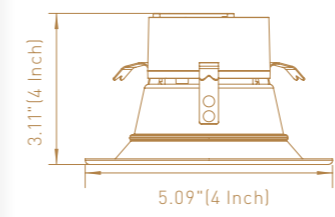

Correlated Color Temperature (CCT)

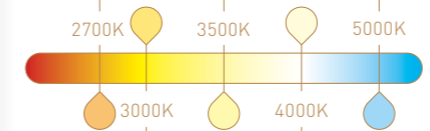

Trim Option

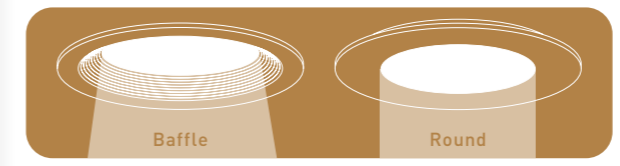




Item Number	Watts	Lumens	Efficacy (lm/W)	Dimmable	Life Span (Hr)	Trim Size (Inch)	CRI	MOL (Inch)	MOD (Inch)	Weight (Lb)
HT-US-G2Y5CD48.5W-927-21ZZ-V1	8.5	765	90	Y	50000	4	90	3.11	5.09	0.42
HT-US-G2Y5CD612.5W-927-21ZZ-V1	12.5	1125	90	Y	50000	6	90	3.23	7.32	0.68
HT-US-G2Y5CD48.5W-927-11ZZ-V1	8.5	765	90	Y	50000	4	90	3.11	5.09	0.42
HT-US-G2Y5CD612.5W-927-11ZZ-V1	12.5	1125	90	Y	50000	6	90	3.23	7.32	0.68



CCT Selectable Square Downlight Retrofit

FEATURES

- E26/GU24 Socket
- 120V Input, 50/60Hz
- PF >0.9 - CRI>90
- High transmission frosted PC lens to reduce glare
- Square design meet your needs for different architecture and structure
- White tunable in 5 discrete color temperatures 27K/30K/35K/40K/50K, can be changed before, during or after installation
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL Energy Star and CEC qualify

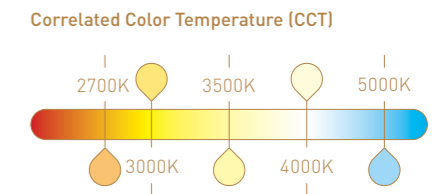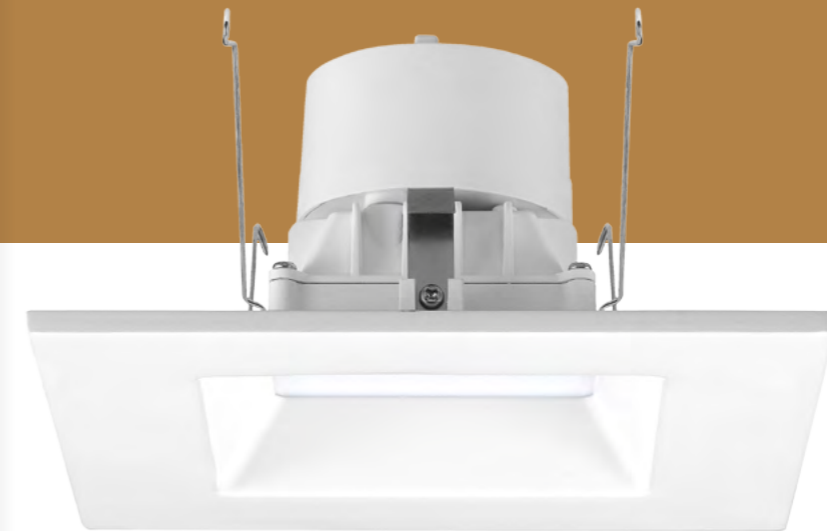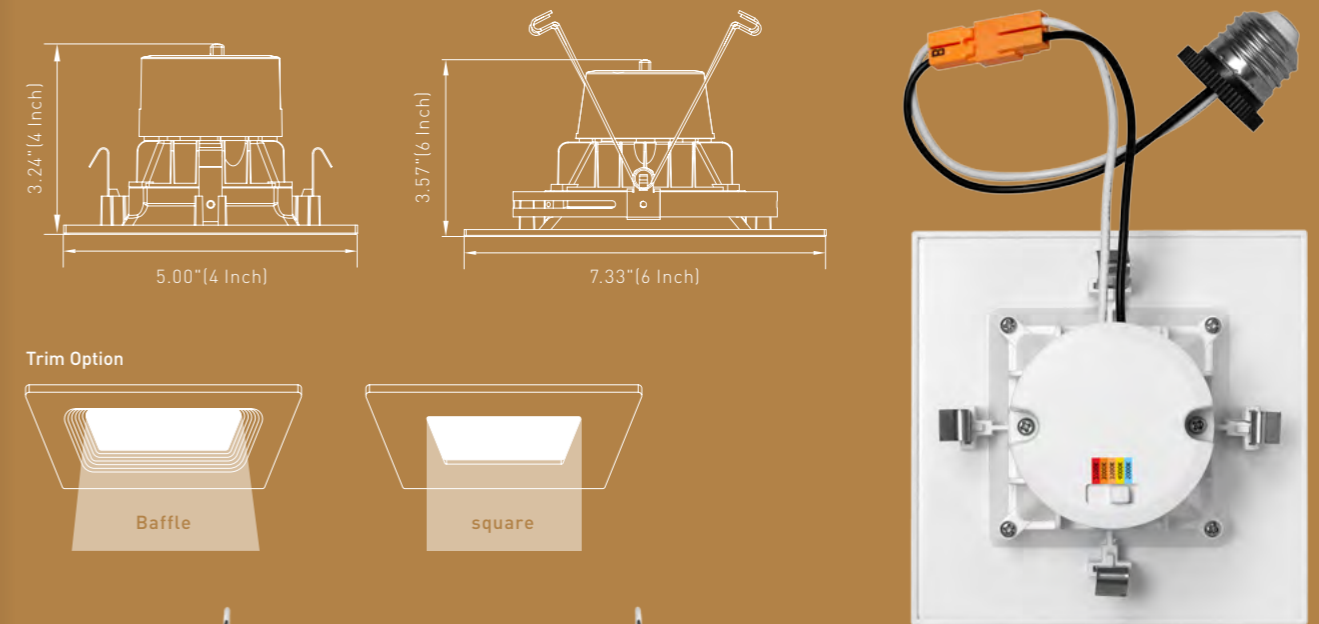

- Dimmable
- 5 Years Limited Warranty
- High Color Rendering (CRI>90)
- Wet Location

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G15CDEL4-911-27FG-ZZ	11	750	65	Y	50000	4	90	3.24	5.00	0.47
HT-G15CDEL6-915-27FG-ZZ	15	1000	65	Y	50000	6	90	3.57	7.33	0.75
HT-G15CDEL4-911-27FT-ZZ	11	750	65	Y	50000	4	90	3.24	5.00	0.47
HT-G15CDEL6-915-27FT-ZZ	15	1000	65	Y	50000	6	90	3.57	7.33	0.75

CCT Selectable J-Box Recessed Downlight

FEATURES

- All-in-one solution is built with an integral junction box that eliminates the need for traditional recessed housing, mounts directly into ceiling
- IC and Airtight rated for direct installation
- 120V 60Hz operation
- PF >0.9 - CRI >90
- White tunable in 5 discrete color temperatures 27K/30K/35K/40K/50K, can be changed before, during or after installation
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify



Dimmable



5 Years Limited Warranty






High Color Rendering (CRI > 90)




Wet Location


Correlated Color Temperature (CCT)

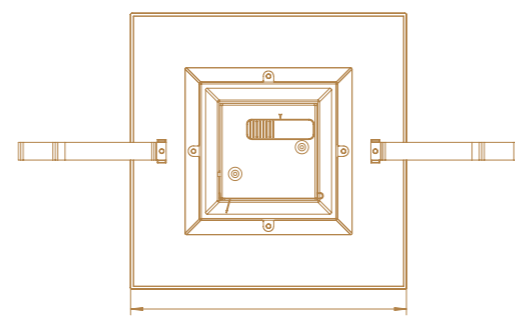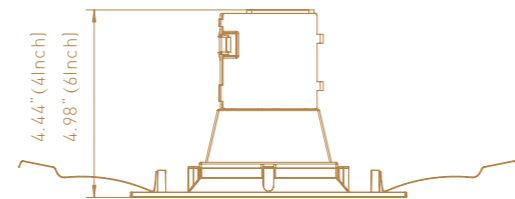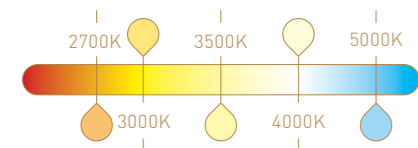

5.00" (4Inch)
7.32" (6Inch)

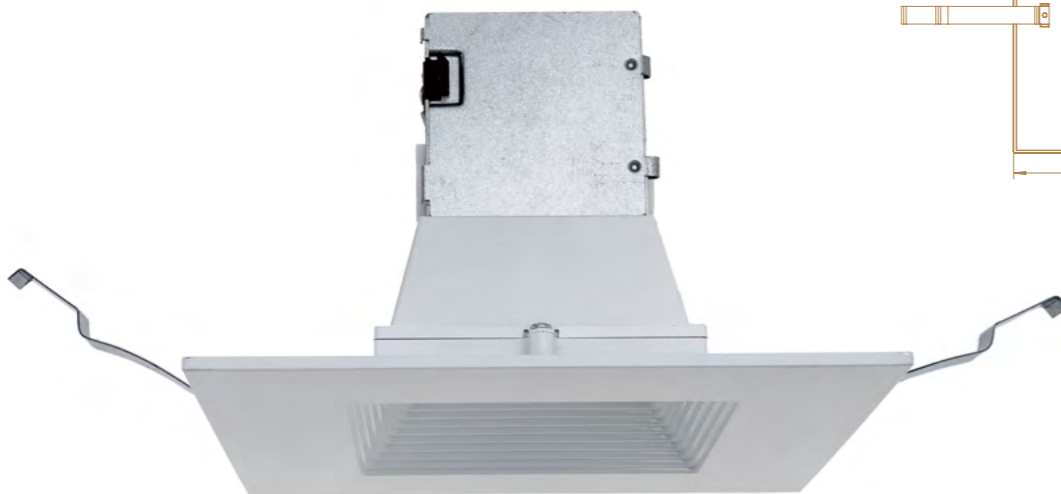


Item Number	Watts	Lumens	Efficacy (lm/W)	Dimmable	Life Span (Hr)	Trim Size (Inch)	CRI	MOL (Inch)	MOD (Inch)	Weight (Lb)
HT-US-G3Y5CD411W-927-SSZZ-V1	11	750	68	Y	50000	4	90	4.60	4.96	0.75
HT-US-G3Y5CD515W-927-SSZZ-V1	15	950	63	Y	50000	5	90	5.42	6.31	1.06
HT-US-G3Y5CD615W-927-SSZZ-V1	15	950	63	Y	50000	6	90	5.42	7.24	1.30
HT-US-G3F5CD411W-927-SSZZ-V1	11	750	68	Y	50000	4	90	4.60	4.96	0.75
HT-US-G3F5CD615W-927-SSZZ-V1	15	950	63	Y	50000	6	90	5.42	7.24	1.30

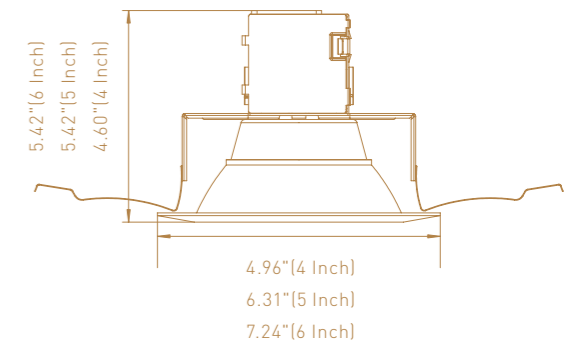

DOB Downlight Retrofits

FEATURES

- E26/GU24 Socket
- 120V Input, 50/60Hz
- PF >0.9 - CRI >80
- High transmission frosted PC lens
- Driver on Board Solution
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- UL Classification for damp locations usage

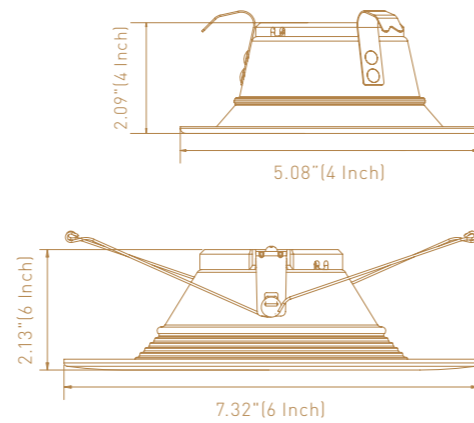


Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-VEAD4-R10W-XX2HL-CC	10	600	60	Y	50000	4	80	2.09	5.08	0.37
HT-VEAD6-R11W-XX2HL-CC	11	750	68	Y	50000	6	80	2.13	7.32	0.61

LED Disk Downlight Retrofits

FEATURES

- E26/GU24 Socket
- 120V Input, 50/60Hz
- PF >0.9 - CRI >90
- High transmission frosted PC lens to reduce glare
- Universal surface mount, fits most J-box and recessed housings
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- UL Classification for damp locations usage
- Energy Star and CEC qualify

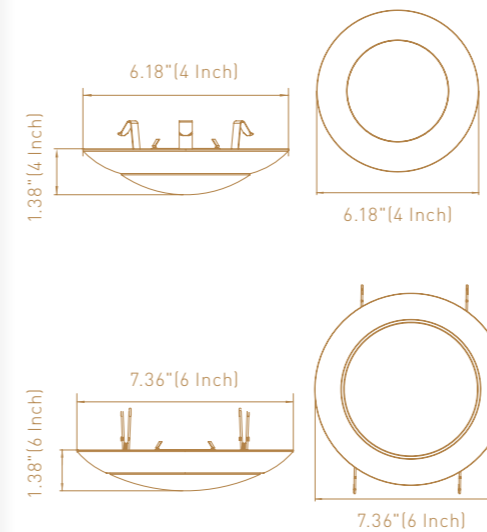


Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
LT-US-DX49W2XXYZ-VA	9	540	60	Y	50000	4	90	1.38	6.18	0.49
LT-US-DX615W2XXYZ-VA	15	900	60	Y	50000	6	90	1.38	7.36	0.65




LED Slim Recessed Downlight

FEATURES

- Die cast aluminum housing routes heat away from electrical components
- 120V Input, 50/60Hz
- PF >0.9 - CRI 80/90 options
- High quality PMMA light guide plate creates uniform light, edge to edge, for every lit spaces
- Available in wide range of color temperature in 2700K- 5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify

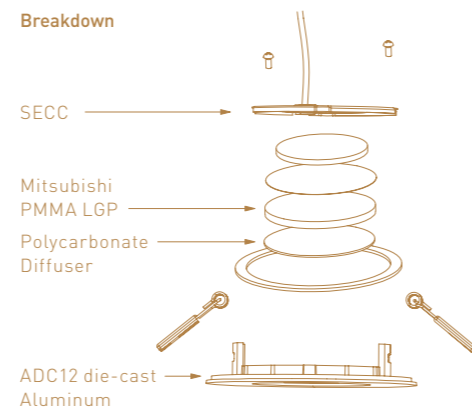

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G6USSD3-C08-XXS-ZZ	8	540/500	67/62	Y	50000	3	80/90	0.87	3.35	0.60
HT-G6USSD4-C10-XXS-ZZ	10	750/650	75/65	Y	50000	4	80/90	0.87	4.72	0.86
HT-G6USSD6-C12-XXS-ZZ	12	1000/900	83/75	Y	50000	6	80/90	0.87	6.69	1.21
HT-G6USSD8-C18-XXS-ZZ	18	1600/1500	89/83	Y	50000	8	80/90	0.87	8.56	1.75

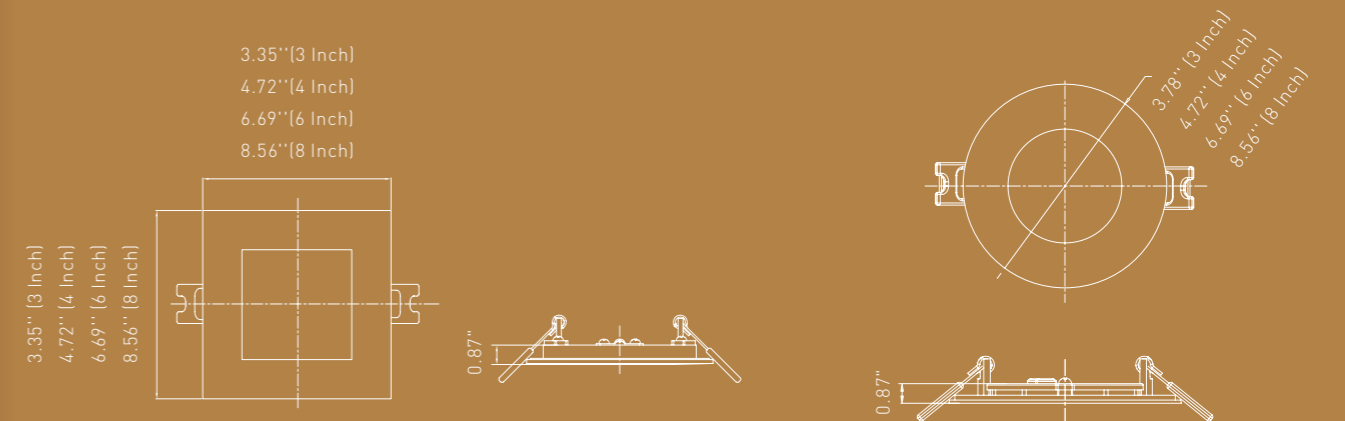

Square Trim

Round Trim




White

Satin Nickel

White

Satin Nickel



Black

Bronze

Black

Bronze



Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G6URRD3-C08-XXS-ZZ	8	540/500	67/62	Y	50000	3	80/90	0.87	3.78	0.75
HT-G6URRD4-C10-XXS-ZZ	10	750/650	75/65	Y	50000	4	80/90	0.87	4.72	0.86
HT-G6URRD6-C12-XXS-ZZ	12	1000/900	80/75	Y	50000	6	80/90	0.87	6.69	1.13
HT-G6URRD8-C18-XXS-ZZ	18	1600/1500	85/83	Y	50000	8	80/90	0.87	8.56	1.66



Dimmable



5 Years
Limited Warranty



High Color Rendering
(CRI>90)





Wet Location

LED Slim Recessed Downlight Baffle

FEATURES

- Die cast aluminum housing routes heat away from electrical components
- 120V Input, 50/60Hz
- PF >0.9 - CRI 90 options
- High quality PMMA light guide plate creates uniform light, edge to edge, for every lit spaces
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify

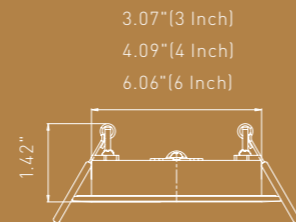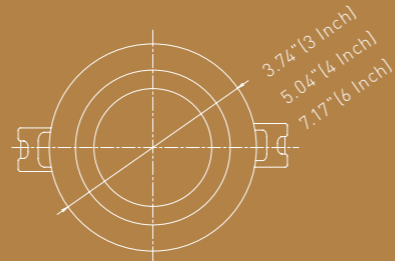

Dimmable



5 Years Limited Warranty



High Color Rendering (CRI>90)



Wet Location



Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G2FRRD3-C06-XXS-ZZ	6	370	70	Y	50000	3	90	1.42	3.07	0.64
HT-G2FRRD4-C09-XXS-ZZ	9	540	67	Y	50000	4	90	1.42	4.09	0.92
HT-G2FRRD6-C12-XXS-ZZ	12	800	80	Y	50000	6	90	1.42	6.06	1.24

LED Gimble Recessed Downlight

FEATURES

- Die cast aluminum housing routes heat away from electrical components
- 120V Input, 50/60Hz
- PF >0.9 - CRI90 options
- High quality PMMA light guide plate creates uniform light, edge to edge, for every lit spaces
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify



Dimmable





5 Years Limited Warranty



High Color Rendering (CRI>90)



Wet Location

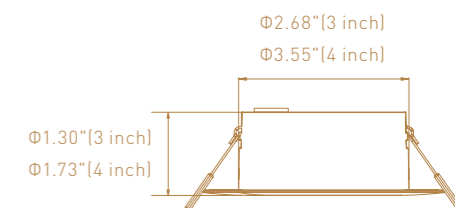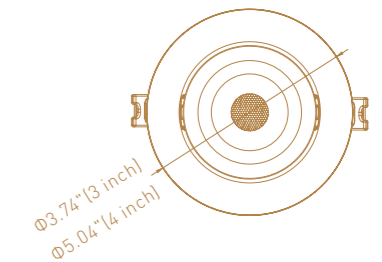

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G4URRD3-C06-XXS-ZZ	6	370	65	Y	50000	3	90	1.30	3.74	0.82
HT-G4URRD4-C09-XXS-ZZ	9	540	60	Y	50000	4	90	1.73	5.04	1.21

Integrated J-BOX Slim Downlight

FEATURES

- All-in-one solution is built with an integral junction box that eliminates the need for traditional recessed housing, mounts directly into ceiling
- Offer an attractive visual aesthetic with both round and square apertures
- 120V 60Hz operation
- PF >0.9 - CRI >80/90
- Available in wide range of color temperature in 2700K-5000K
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star listed



Dimmable







5 Years
Limited Warranty



High Color Rendering
(CRI > 90)



Wet Location

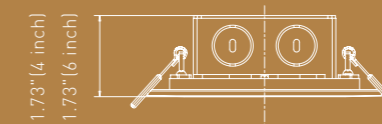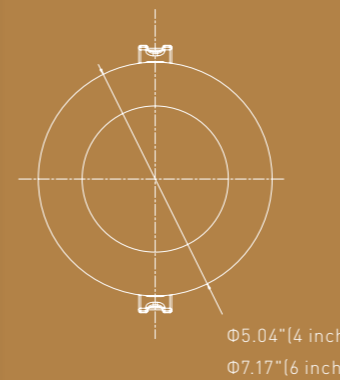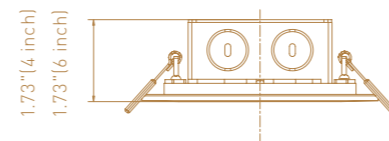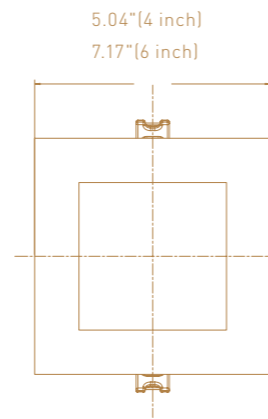

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G3URRD4-C09-XXS-ZZ	9	600/540	67/60	Y	50000	4	80/90	1.73	5.04	0.90
HT-G3URRD6-C12-XXS-ZZ	12	900/800	75/66	Y	50000	6	80/90	1.73	7.17	1.20
HT-G3USRD4-C09-XXS-ZZ	9	600/540	67/60	Y	50000	4	80/90	1.73	5.04	0.96
HT-G3USRD6-C12-XXS-ZZ	12	900/800	75/67	Y	50000	6	80/90	1.73	7.17	1.28

CCT Selectable Slim Recessed

FEATURES

- Die cast aluminum housing routes heat away from electrical components
- 120V Input, 50/60Hz
- PF >0.9 - CRI 80/90 options
- High quality PMMA light guide plate creates uniform light, edge to edge, for every lit spaces
- White tunable in 5 discrete color temperatures 27K/30K/35K/40K/50K, can be changed before, during or after installation
- 5 years limited warranty
- Smooth dimming feature and compatible with a wide variety of dimmers
- ETL, Energy Star and CEC qualify



Dimmable



5 Years
Limited Warranty





High Color Rendering
(CRI>90)




New Product

Correlated Color Temperature (CCT)

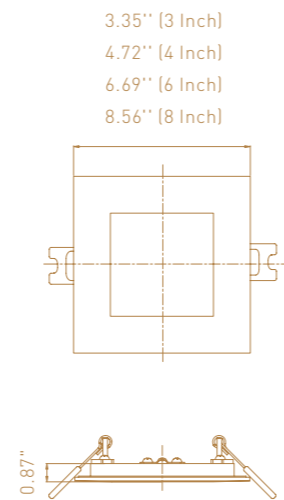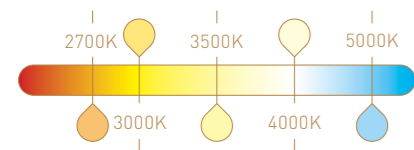

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G65USSD3-C06-27S-ZZ	6	400/370	67/62	Y	50000	3	80/90	0.87	3.35	0.60
HT-G65USSD3-C08-27S-ZZ	8	540/500	68/63	Y	50000	3	80/90	0.87	3.35	0.60
HT-G65USSD4-C10-27S-ZZ	10	750/650	75/65	Y	50000	4	80/90	0.87	4.72	0.86
HT-G65USSD4-C12-27S-ZZ	12	950/850	79/71	Y	50000	4	80/90	0.87	4.72	0.86
HT-G65USSD6-C12-27S-ZZ	12	1000/900	83/75	Y	50000	6	80/90	0.87	6.69	1.21
HT-G65USSD6-C15-27S-ZZ	15	1200/1100	80/73	Y	50000	6	80/90	0.87	6.69	1.21
HT-G65USSD8-C18-27S-ZZ	18	1600/1500	89/83	Y	50000	8	80/90	0.87	8.56	1.76

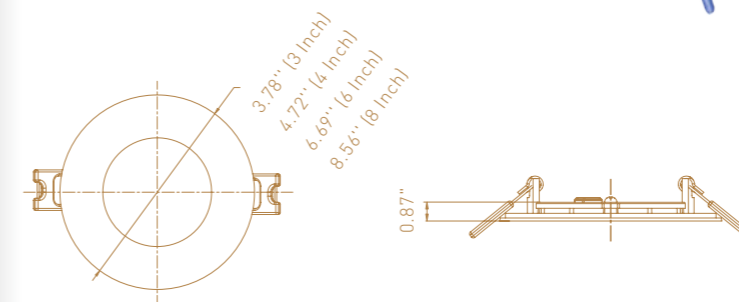

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-G65URRD3-C06-27S-ZZ	6	400/370	67/62	Y	50000	3	80/90	0.87	3.78	0.75
HT-G65URRD3-C08-27S-ZZ	8	540/500	68/63	Y	50000	3	80/90	0.87	3.78	0.75
HT-G65URRD4-C10-27S-ZZ	10	750/650	75/65	Y	50000	4	80/90	0.87	4.72	0.86
HT-G65URRD4-C12-27S-ZZ	12	950/850	79/71	Y	50000	4	80/90	0.87	4.72	0.86
HT-G65URRD6-C12-27S-ZZ	12	1000/900	83/75	Y	50000	6	80/90	0.87	6.69	1.13
HT-G65URRD6-C15-27S-ZZ	15	1200/1100	80/73	Y	50000	6	80/90	0.87	6.69	1.13
HT-G65URRD8-C18-27S-ZZ	18	1600/1500	89/83	Y	50000	8	80/90	0.87	8.56	1.61





Eco Commercial Downlight Retrofit Lumen Adjustable

FEATURES

- High quality spinning aluminum housing with powder coated paint
- 120-277V input 50/60Hz
- PF>0.9 - CRI> 90
- Available in wide range of color temperature 2700K-5000K
- 5 years limited warranty
- Lumen adjustable during 3-stage 50%, 75%, 100%
- ETL and Energy Star listed



New Product




5 Years
Limited Warranty





120-277V
Universal Voltage




High Color Rendering
(CRI>90)



Selectable Lumen



Selectable Lumen




Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
LT-ICCDR6-Z21/UNV-XXDE-3YY	21	750/1125/1500	71	N	50000	6	90	4.37	7.48	0.39
LT-ICCDR8-Z27/UNV-XXDE-3YY	27	1000/1500/2000	74	N	50000	8	90	4.17	10.17	0.58

NEW Construction Commercial Recessed Downlight

FEATURES

- Heavy-gauge galvanized steel housing provides a secure mounting platform for the electrical components and protects the optical assembly.
- Universal mounting brackets adjust vertically and accept L-BAR interlocking, expandable c-channel hanger bars which are supplied standard.
- Engineered heat sink provides passive cooling for optimum heat management of the LED engine.
- 120-277V Input, 50/60Hz
- PF>0.9 - CRI>80
- Available in wide range of color temperature from 2700K-5000K
- 5 years limited warranty
- 0-10V smooth dimming feature and compatible with a wide

 Dimmable	 5 Years Limited Warranty	 120-277V Universal Voltage	 New Product
---	---	---	--

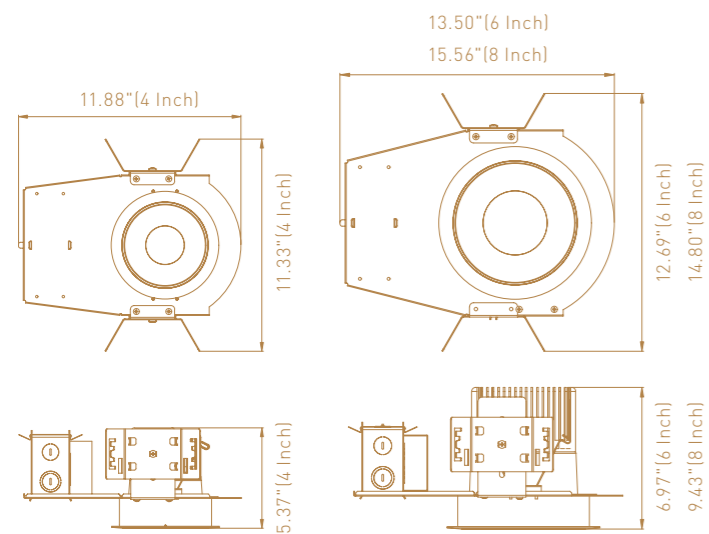

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
HT-US-ID413-CXXD/UNV-LZ	13	1100	84	Y	50000	4	80	5.37	11.88	4.78
HT-US-ID420-CXXD/UNV-LZ	20	1600	80	Y	50000	4	80	5.37	11.88	4.78
HT-US-ID425-CXXD/UNV-LZ	25	2000	80	Y	50000	4	80	5.37	11.88	4.78
HT-US-ID630-CXXD/UNV-LZ	30	2500	83	Y	50000	6	80	6.97	13.50	6.19
HT-US-ID636-CXXD/UNV-LZ	36	3000	83	Y	50000	6	80	6.97	13.50	6.19
HT-US-ID642-CXXD/UNV-LZ	42	3500	83	Y	50000	6	80	6.97	13.50	6.19
HT-US-ID850-CXXD/UNV-LZ	50	4000	80	Y	50000	8	80	9.43	15.56	7.60
HT-US-ID860-CXXD/UNV-LZ	60	4500	75	Y	50000	8	80	9.43	15.56	7.60
HT-US-ID865-CXXD/UNV-LZ	65	5000	77	Y	50000	8	80	9.43	15.56	7.60



Commercial Recessed Downlight Retrofit



FEATURES

- Heavy gauge aluminum reflector in an anodized clear finish with premium aluminum heat sink for long lasting LED
- High transmission optical acrylic diffusion lens produce high lumen and consistent color rendering
- 120-277V Input, 50/60Hz
- PF>0.9 - CRI>80
- Available in wide range of color temperature from 2700K-5000K
- 5 years limited warranty
- 0-10V smooth dimming feature and compatible with a wide variety of dimmers
- ETL and Energy Star listed



Dimmable




5 Years
Limited Warranty



120-277V
Universal Voltage



Damp Location

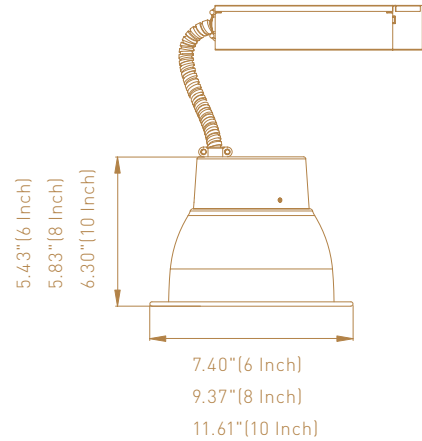

Item Number	Watts	Lumens	Efficacy(lm/W)	Dimmable	Life Span(Hr)	Trim Size(Inch)	CRI	MOL(Inch)	MOD(Inch)	Weight(Lb)
LT-CDR6-Z22/UNV-XXDDY	22	1700	77	Y	50000	6	80	5.43	7.40	2.52
LT-CDR8-Z35/UNV-XXDDY	35	2700	77	Y	50000	8	80	5.83	9.37	2.69
LT-CDR10-Z45/UNV-XXDDY	45	3300	73	Y	50000	10	80	6.30	11.61	3.23



LIJIACHENG
Electric

Hangzhou Lijiacheng Electric Co., Ltd.

GaoHong Industrial Park, Lin'an City, ZheJiang China 311307

Tel: +86 571-6110 5667

Fax: +86 571-6110 5663

E-mail: lucy@ljclight.com.

www.ljclight.cn